



Bekenflo

BEST OEM

INNOVATION

CATALOGUE 2020

BC series Medium-Consistency Pumps

Applications:

Conveyance of stock suspensions
of up to 16% bone dry in the pulp and
paper industry.
Chemical pulp
Mechanical pulp
Waste paper
Molasses



SPECIFICATIONS:


Speed: 1500rpm--2900rpm/1750rpm--3500rpm
Capacity: 5000 admt/d
Head: 195m(max)
Working Condition: 16/25 bar max
Efficiencies: 70%
Stock Consistencies: 16%
Temperature of liquid: -40°C to 140°C , PH=0-14

Application Std : Flange std can be BS,DIN,ISO,etc


Remarks:

We have been OEM for many brands from Europe and USA

Pictures:

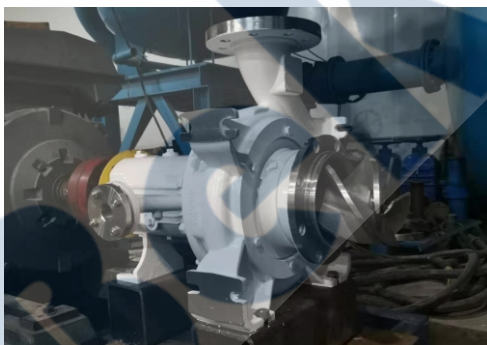

Characteristic curves

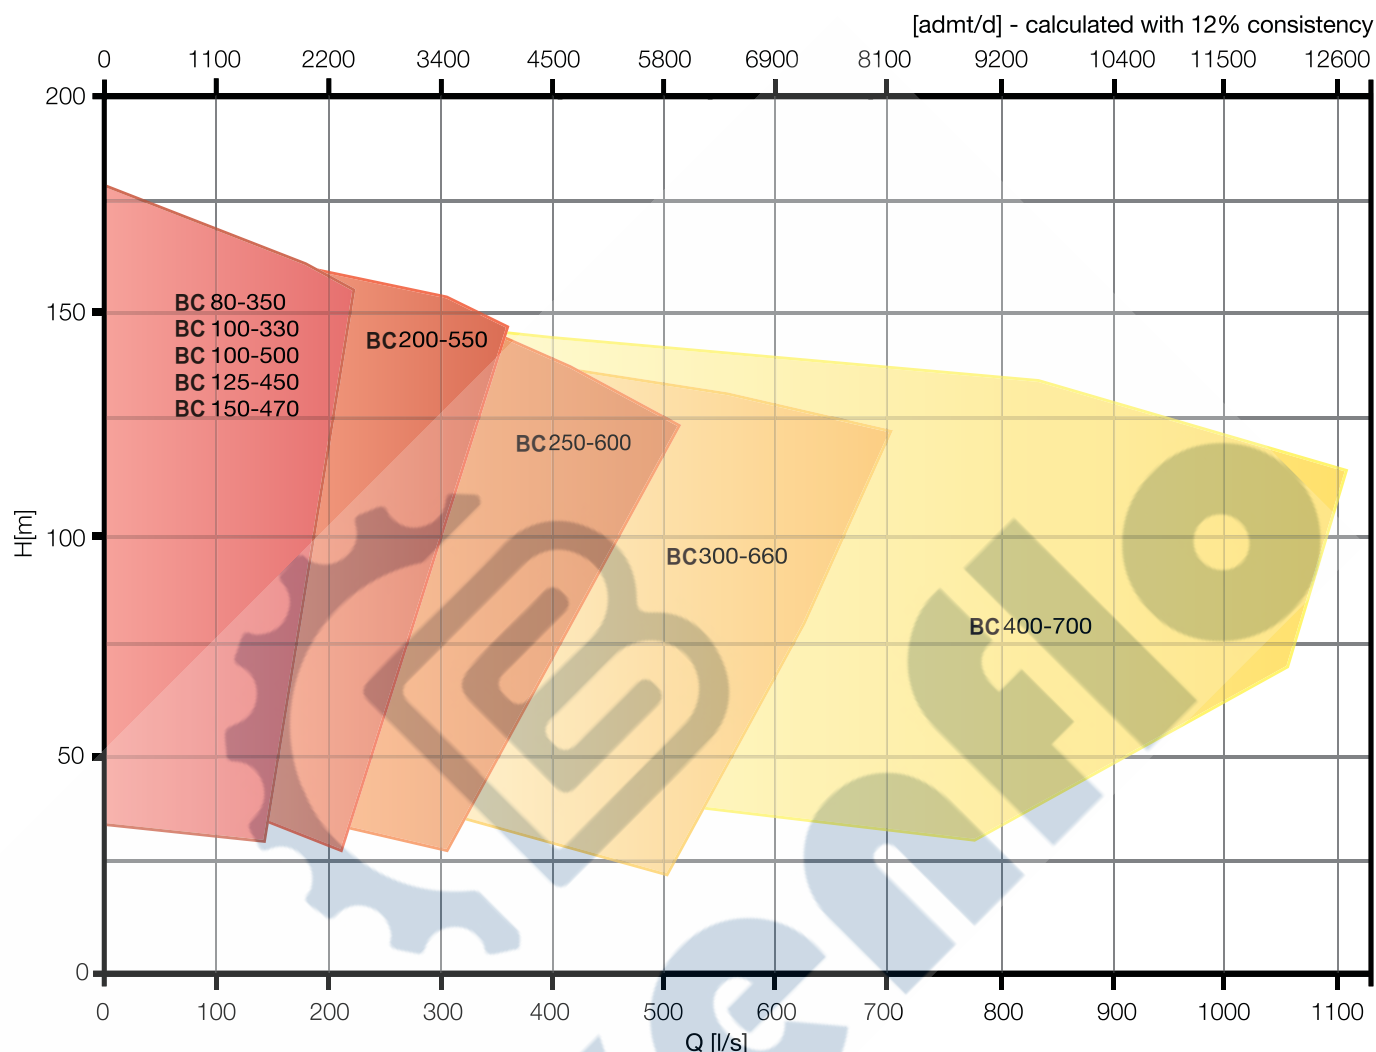

Material combinations

BC series	EN-GJL 250	1.4460/1.4474	1.4462	1.4469	2.4602 Hastelloy®
Impeller/separator		■		■	
Casing/casing cover		■		■	
Bearing housing	■				
Front lining		■		■	
Fluidisator		■		■	
Suction flange		■		■	
Shaft			■		
Suction flange lining					■

European standard		US standard	
Number	Name	Grade	UNS
EN-JL1040	EN-GJL 250	Class 40B	/
1.4460/1.4474	X3CrNiMoN27-5-2	Grade 3A	J93370
1.4462	X2CrNiMoN22-5-3	Grade 3A	S32205
1.4469	GX2CrNiMoN26-7-4	Grade 5A	S32615
2.4602 Hastelloy®	NiCr21Mo14W	Grade 5A	N06022

Brands interchangeable:

Sulzer APP/AUP/CPT/MBN/MC/ZE,
Andritz ACP/MC, Godwin, Pioneer, KSB, Goulds 3196,
Durco Mark III, Gorman-rupp. Monoyo/Seepex/Netzsch,
Warman AH, Flowserve LC, Tsurumi pump, etc.



BEST OEM

INNOVATION

Fuzhou Beken Fluid Co.,LTD.

Add:11th floor, ZhongMing TianAo Building,
No.169 Hudong Road, GuLou District,Fuzhou,Fujian,China.

Tel: 0086-591-87557702

Fax: 0086-591-87557702

Website:www.bekenflo.com

Email: sales@bekenflo.com

Mobile: 0086-18065068870.