



Bekenflo

BEST OEM

INNOVATION

CATALOGUE 2020

BD series Double Suction Split Casing pumps

Applications:

Raw Water Supply
Drinking water supply
Industrial Applications
Irrigation
HVAC and Cooling Tower
Marine and ship buildings
Cold Water Circulation
Pool Water
Condense Systems
Fire Fighting Systems



SPECIFICATIONS:

Speed: 2900rpm/ 1480rpm/1750rpm/3500rpm
Capacity: 60m³/h---2,000m³/h
Head: 20m—145m
Max Speed: 3500rpm (Diameter of impeller will be reduced)
Max Working Temperature: 105 °C
Working Pressure: Generally it is 1.6Mpa, It can rise to 2.4Mpa if material is Nodular cast or Cast Steel .

Application Std : Flange std can be BS,DIN,ANSI,etc

Remarks:

We have been OEM for many brands from Europe and our pumps has been used by famous brands from Middle east to apply for UL/FM Certificate. We can make pumps with the bearing housing as your own design.

Constructure:

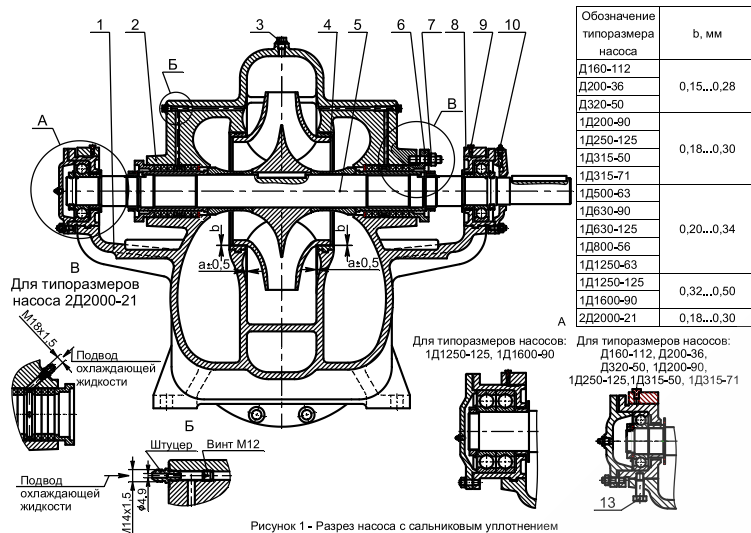


Рисунок 1 - Разрез насоса с сальниковым уплотнением

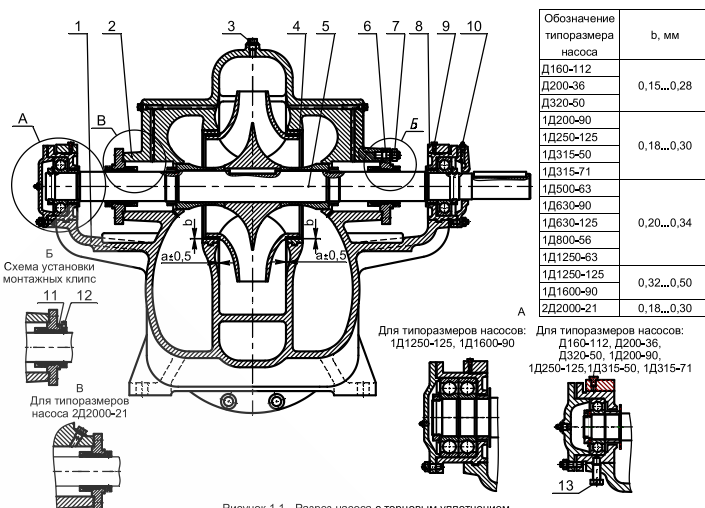


Рисунок 1,1 - Разрез насоса с торцовым уплотнением

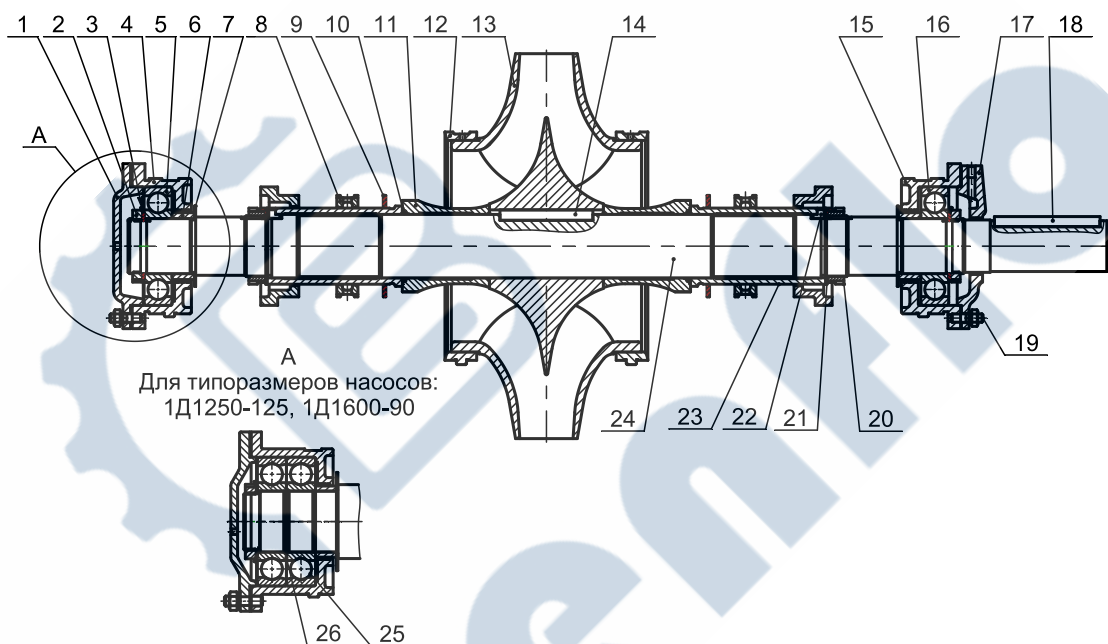


Рисунок 2 - Ротор насоса с сальниковым уплотнением

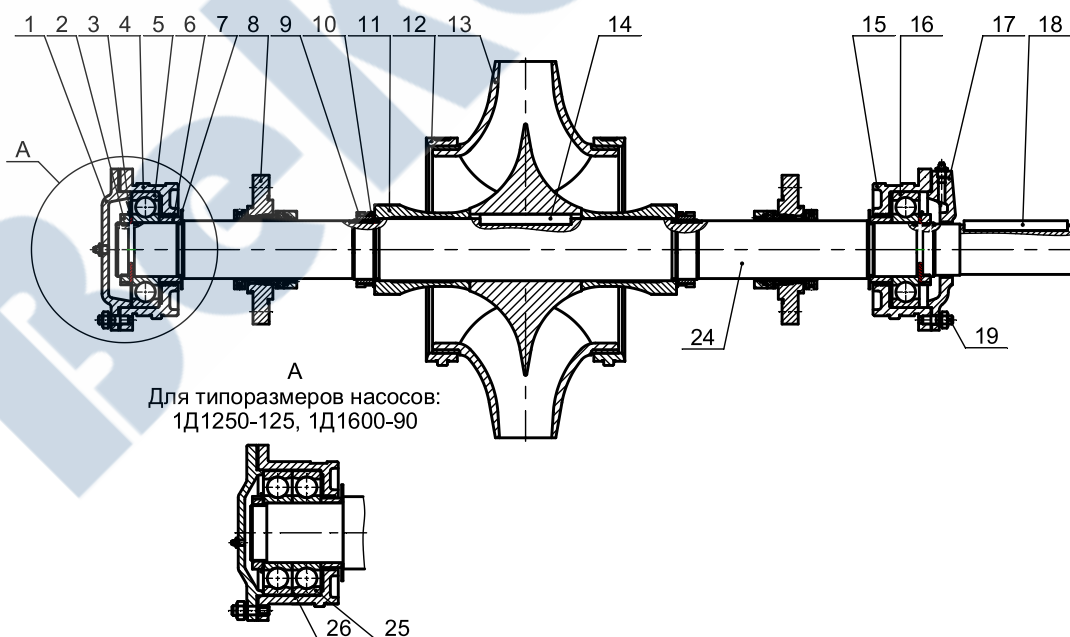


Рисунок 2.1 - Ротор насоса с торцовым уплотнением

Brands interchangeable:

Sulzer APP/AUP/CPT/MBN/MC/ZE,
Andritz ACP/MC, Godwin, Pioneer, KSB, Goulds 3196,
Durco Mark III, Gorman-rupp. Monoyo/Seepex/Netzsch,
Warman AH, Flowserve LC, Tsurumi pump, etc.



BEST OEM

INNOVATION

Fuzhou Beken Fluid Co.,LTD.

Add:11th floor, ZhongMing TianAo Building,
No.169 Hudong Road, GuLou District,Fuzhou,Fujian,China.

Tel: 0086-591-87557702

Fax: 0086-591-87557702

Website:www.bekenflo.com

Email: sales@bekenflo.com

Mobile: 0086-18065068870.