



Bekenflo

BEST OEM

INNOVATION

CATALOGUE 2020

BP series Vacuum assisted selfpriming Pumps

Applications:

Construction
Industry
Municipal
Agriculture
Mining
Dewatering
Industrial Waste
Sewage
Oil Field
Petrochemical
High Pressure Liquid Transfer
Paper Mills
Manure Slurry





SPECIFICATIONS:

Speed: 1500rpm--2900rpm/1750rpm--3500rpm
Capacity: 45,000gpm
Head: 750+ Feet
Size : 3" ----30"
Size of Solid: 1.9cm—14.9cm

Application Std : Flange std can be BS,DIN,ISO,etc

We have been OEM for many brands from Europe and USA

Constructure:

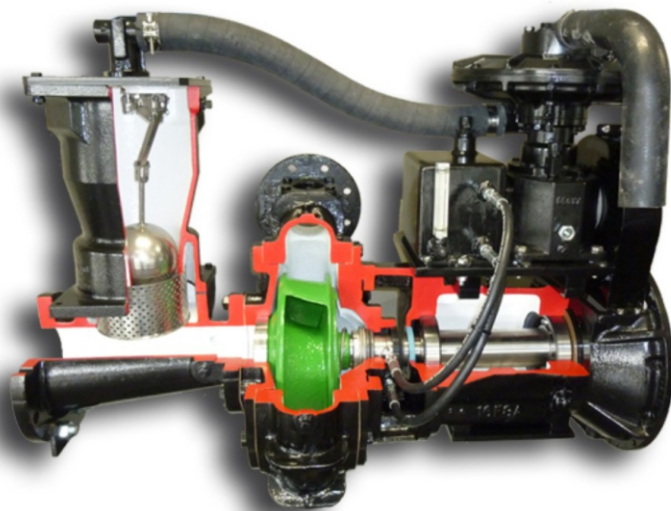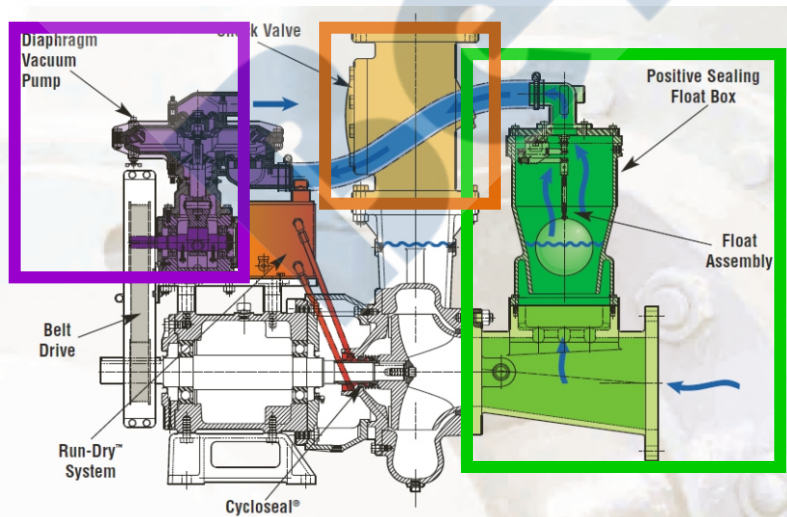

High Volume Pumps


High Volume Centrifugal Pumps are designed to meet unique job challenges – providing high flows, rapid priming, and unparalleled efficiency. All pumps offer advanced run-dry mechanical seals, LOFA auto-start/stop control panels, and plug-in GPS telemetry.

Features and Options

- Vacuum Assisted Packages 3–30"
- Flow Rates up to 45,000 GPM
- TDH up to 250'/108 PSI
- CA6NM Hardened Stainless Impeller
- 50 CFM Dry-Priming Vacuum Pump
- Stainless Steel Diesel or Electric



Model	Size in (cm)	Flow gpm (m ³ /m)	TDH ft (m)	Solids in (cm)
PP44S10	4 x 4 (10.1 x 10.1)	1520 (5.8)	146 (44.5)	3 (7.6)
PP66S12	6 x 6 (15.2 x 15.2)	2700 (10.2)	163 (49.7)	3 (7.6)
Super PP66S14	6 x 6 (15.2 x 15.2)	3400 (12.9)	248 (75.6)	3 (7.6)
Super PP88S12	8 x 8 (20.3 x 20.3)	4600 (17.4)	180 (54.9)	3 (7.6)
PP1212S17	12 x 12 (30.4 x 30.4)	9270 (35.1)	122 (37.2)	4.5 (11.4)
Super PP1212S17	12 x 12 (30.4 x 30.4)	9230 (35.0)	190 (57.9)	4.5 (11.4)
PP1414S17	14 x 14 (35.5 x 35.5)	12300 (46.6)	188 (57.3)	4 (10.2)
Super PP1818S225	18 x 18 (45.7 x 47.5)	19350 (73.3)	216 (65.8)	4.5 (11.4)
PP3030S34	30 x 30 (76.2 x 76.2)	45000 (170.6)	125 (38.1)	5.9 (14.9)

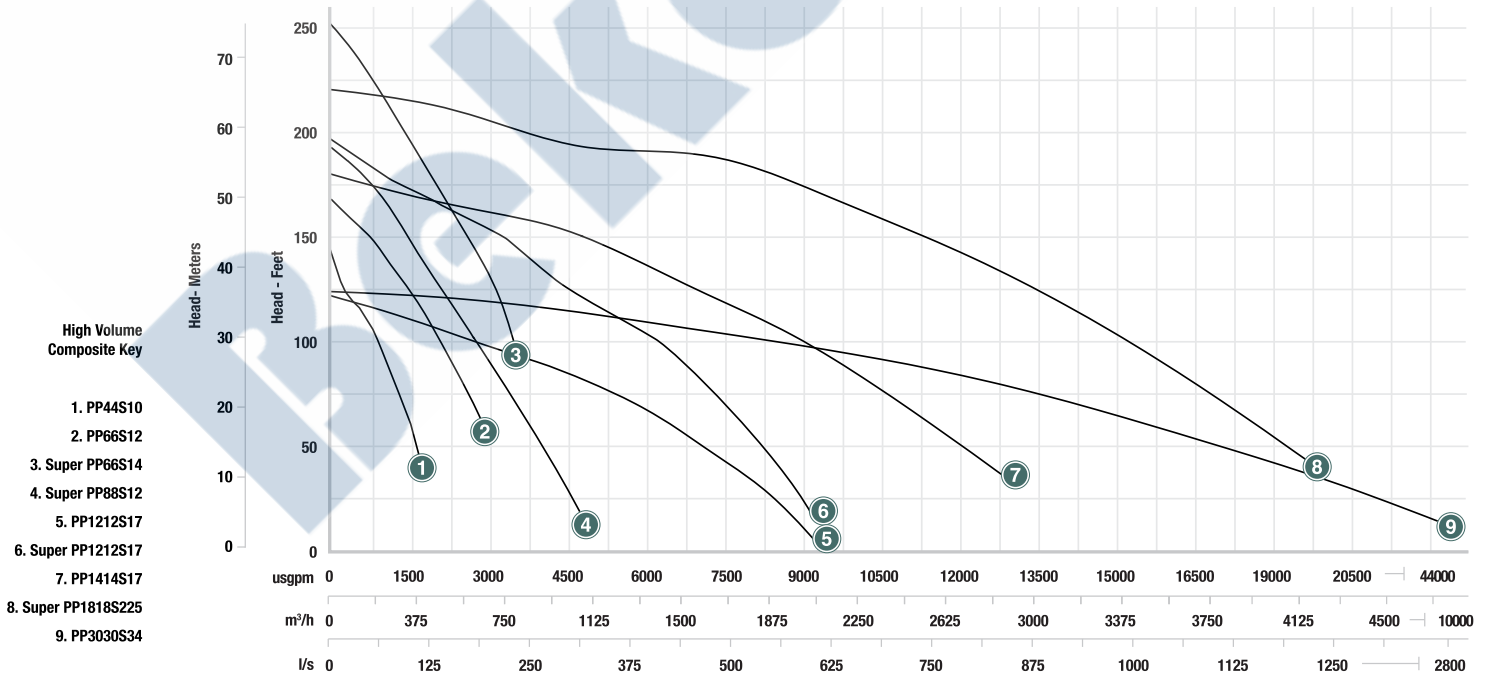


High Head Pumps

Features and Options

- Vacuum Assisted Packages 3–12"
- Flow Rates up to 9,000 GPM
- TDH up to 750'/325 PSI
- CA6NM Hardened Stainless Impeller
- 50 CFM Dry-Priming Vacuum Pump
- Stainless Steel Diesel or Electric



Model	Size in (cm)	Flow gpm (m ³ /m)	TDH ft (m)	Solids in (cm)
Super PP43C21	4 x 3 (10.2 x 7.6)	710 (2.7)	770 (234.7)	0.78 (2)
PP53C14	5 x 3 (12.7 x 7.6)	855 (3.2)	292 (89.0)	0.75 (1.9)
PP63C17	6 x 3 (15.24 x 7.6)	1200 (4.5)	510 (155.4)	0.75 (1.9)
PP64S17	6 x 4 (15.2 x 10.2)	2550 (9.7)	408 (124.4)	3 (7.6)
Super PP64C21	6 x 4 (15.2 x 10.2)	1350 (5.1)	610 (185.9)	0.88 (2.2)
PP86S17	8 x 6 (20.3 x 12.2)	4880 (18.5)	352 (107.3)	3 (7.6)
Super PP86C21	8 x 6 (20.3 x 12.2)	3745 (14.2)	600 (182.9)	1.5 (3.8)
PP108S17	10 x 8 (25.4 x 20.3)	7180 (27.2)	380 (115.8)	3.5 (8.9)
Super PP108S17	10 x 8 (25.4 x 20.3)	8040 (30.5)	491 (149.7)	3.5 (8.9)
PP128S22	12 x 8 (30.5 x 20.3)	8950 (33.9)	430 (131.1)	3 (7.6)

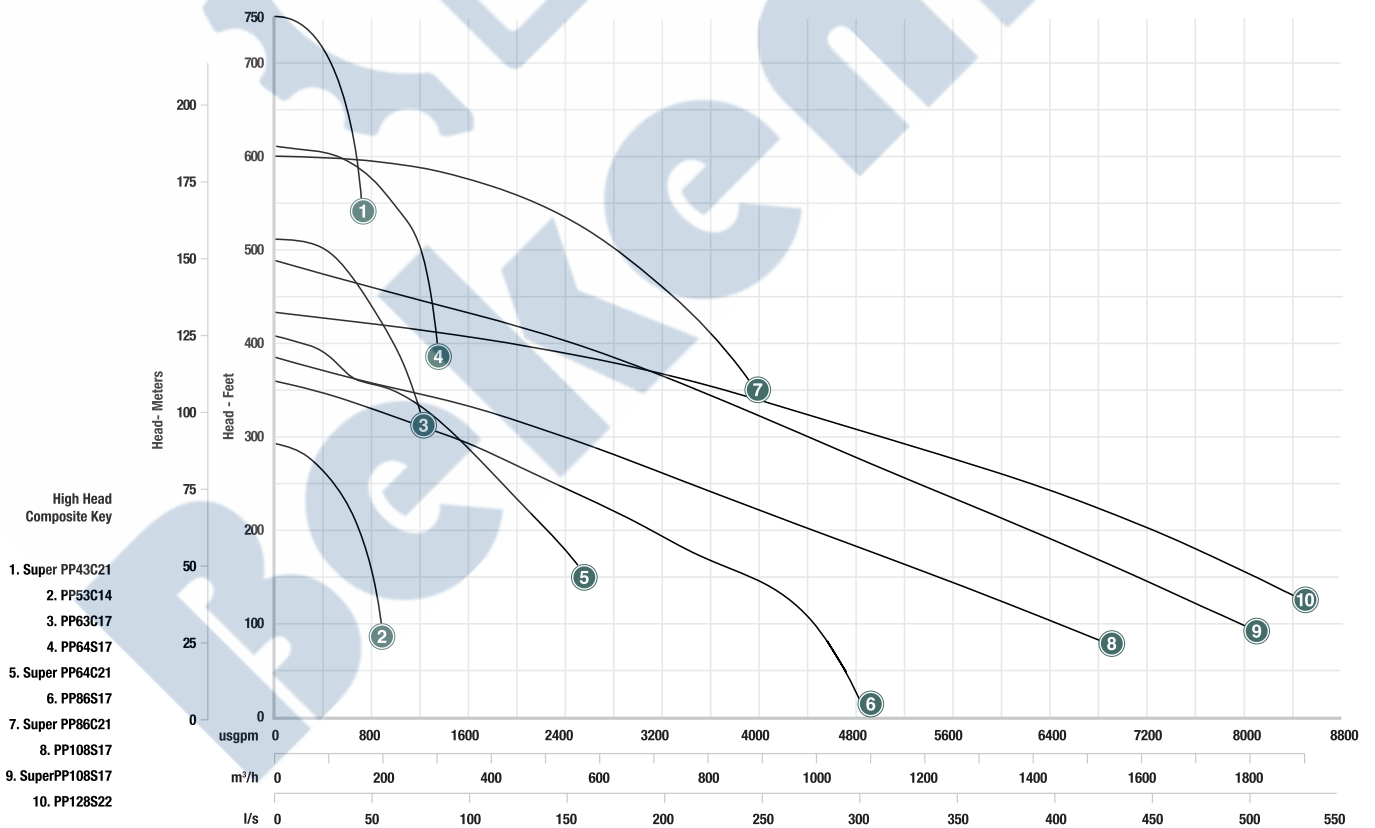

Brands interchangeable:

Sulzer APP/AUP/CPT/MBN/MC/ZE,
Andritz ACP/MC, Godwin, Pioneer, KSB, Goulds 3196,
Durco Mark III, Gorman-rupp. Monoyo/Seepex/Netzsch,
Warman AH, Flowserve LC, Tsurumi pump, etc.



Fuzhou Beken Fluid Co.,LTD.

Add:11th floor, ZhongMing TianAo Building,
No.169 Hudong Road, GuLou District,Fuzhou,Fujian,China.

Tel: 0086-591-87557702

Fax: 0086-591-87557702

Website:www.bekenflo.com

Email: sales@bekenflo.com

Mobile: 0086-18065068870.

