



Bekenflo

BEST OEM

INNOVATION

CATALOGUE 2020

BG series Vacuum assisted selfpriming Pumps

Applications:

Construction
Municipal
Mining
Industrial Waste
Oil Field
High Pressure Liquid Transfer
Manure Slurry

Industry
Agriculture
Dewatering
Sewage
Petrochemical
Paper Mills

SPECIFICATIONS:


Speed: 1500rpm--2900rpm/1750rpm--3500rpm
Capacity: 80—3500m³/h
Head: 32---160m
Size of discharge : 80mm----450mm
Size of Solid: 2.5cm—12.5cm

Application Std : Flange std can be BS,DIN,ISO,etc



Remarks:

We have been OEM for many brands from Europe and USA

Constructure:

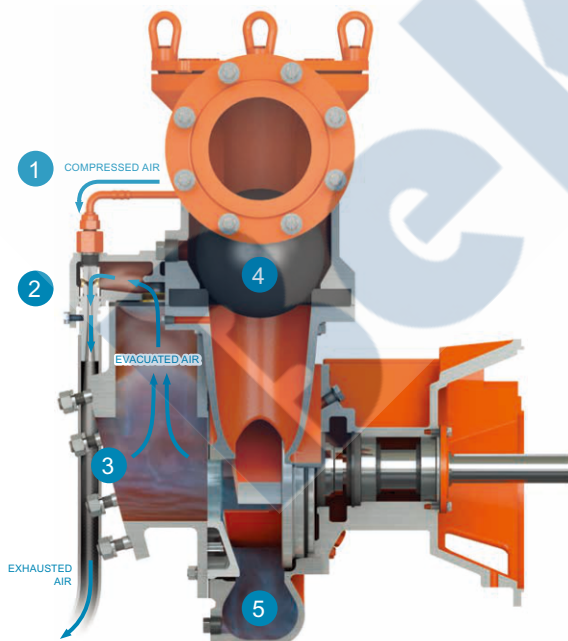

Performance Curve

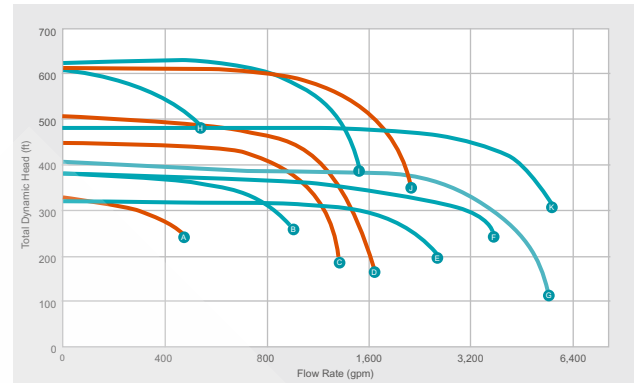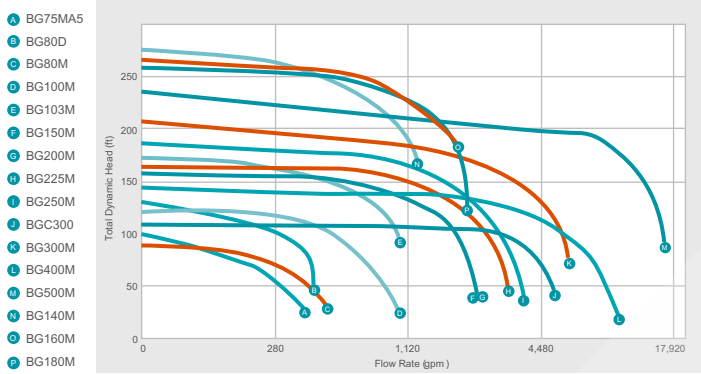

BG75MA5	BG80D	BG80M	BG100M	BG103M	BG150M	BG200M
---------	-------	-------	--------	--------	--------	--------

Branch Size (in)	2x2/3x3	3x3	3x3	4x4	4x4	6x6	8x8
Flow Range (gpm)	0-300	0-350	0-350	100-750	300-1,000	700-2,080	800-2,300
Max Total Dynamic Head (ft)	105	135	95	125	175	160	160
HP@RPM	17@3,000	20@3,000	18@2,200	30@2,200	46@2,200	74@2,200	74@2,200
Solids Handling (in)	1 5/8	1 5/8	1 5/8	1 3/4	3	3	3
Impeller Diameter (in)	6 3/4	6 5/8	7 1/2	9 1/8	10 1/8	11	11
Standard Mount	Trailer	Trailer	Trailer	Trailer	Trailer	Trailer	Trailer
Height (in)	70	70	70	70	77	77	77
Length (in)	102	102	102	102	119	119	119
Width (in)	54	54	54	54	66	66	66
Wet Weight (lb)	1,770	1,770	1,800	2,100	2,830	3,630	3,690
Performance Curve	A	B	C	D	E	F	G

HL225M	HL250M	HL110M	HL130M	HL160M	HL260M
10x8	12x10	4x3	6x4	8x6	10x10
1,500-3,600	2,500-5,200	200-600	400-1,300	400-2,000	1,500-5,300
380	405	615	630	620	480
300@2000	475@2000	156@2200	300@2100	475@2000	700@1800
2 1/2	2 1/2	3/4	7/8	1 1/8	2
17 5/8	17 5/8	18 5/8	20 1/4	20	21 1/4
Skid Base	Skid Base	Skid Base	Skid Base	Skid Base	Skid Base
97	95	84	97	95	99
152	162	147	152	162	168
62	70	53	60	67	79
10,560	14,030	6,740	10,490	14,040	17,550
F	G	H	I	J	K

Brands interchangeable:

Sulzer APP/AUP/CPT/MBN/MC/ZE,
Andritz ACP/MC, Godwin, Pioneer, KSB, Goulds 3196,
Durco Mark III, Gorman-rupp. Monoyo/Seepex/Netzsch,
Warman AH, Flowserve LC, Tsurumi pump, etc.



Fuzhou Beken Fluid Co.,LTD.

Add:11th floor, ZhongMing TianAo Building,
No.169 Hudong Road, GuLou District,Fuzhou,Fujian,China.

Tel: 0086-591-87557702

Fax: 0086-591-87557702

Website:www.bekenflo.com

Email: sales@bekenflo.com

Mobile: 0086-18065068870.

