



Bekenflo

BEST OEM

INNOVATION

CATALOGUE 2020

BPP series End Suction Single Stage Centrifugal Pumps

Applications:

Oil&Gas
Hydrocarbon Processing Industry.
Power Generation
Pulp and Paper
General Industry
Chemical Processing Industry
Water



SPECIFICATIONS:

Speed: 1500rpm--2900rpm/1750rpm--3500rpm
Capacity: 2800m³/h (max)
Head: 150m
Working Condition: 16/25 bar max
Temperature of liquid: -40°C to 180°C , PH=0-14


Application Std : Flange std can be BS,DIN,ISO,etc

Remarks:

We have been OEM for many brands from Europe and USA


Constructure:

Spare Parts List

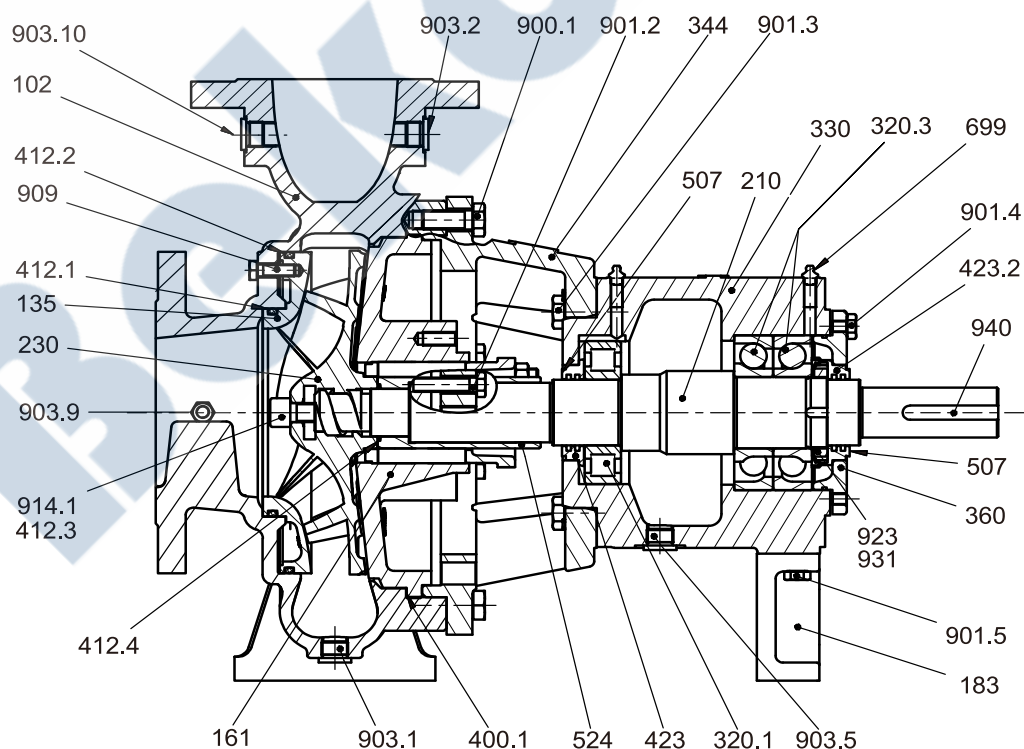


Position	Spare Parts List
102	Pumpcasing
135	Wear Plate
161	Cover for mechanical seal and packing
161.2	Cover for dynamical Seal
183	Support feed
210	Shaft
230	Impeller
320.1	Bearing
320.2	Bearing
330	Bearing housing
344	Frame adaptor
360	Bearing cover
400.1	Gasket
400.2	Gasket
400.3	Gasket
412.1	O-Ring
412.2	O-Ring
412.3	O-Ring
412.4	O-Ring
412.5	O-Ring
412.6	O-Ring
412.7	O-Ring
412.8	O-Ring
423	Labyrinth ring
423.2	Labyrinth ring
433	Mechn. Seal
435	Gasket
451	Stuffing box housing
452	Packing gland
456	Bushing
458	Lanternring
461	Softpacking
471.2	Gland
475	Sealing ring


Position	Spare Parts List
507	Deflector
524	Shaftsleeve
562.1	Pin
604	Expeller
636	Grease nipple
685	Guard end
686	Guard end
686.3	Guard end
723	Flange for mechn. Seal
840	Coupling
890	Baseplate
901.1	Screw
901.2	Screw
901.3	Screw
901.4	Screw
901.5	Screw
901.6	Screw
901.7	Screw
901.8	Screw
901.9	Screw
901.10	Screw
902.1	Screw
903.1	Plug
903.2	Plug
903.3	Plug
903.4	Plug
903.5	Plug
904	Stud
909	Screw
914.1	Screw
920.2	Nut
920.3	Nut
923	Nut for bearing
931	Washer
940	Key
918	Screw for baseplate
920.4	Nut

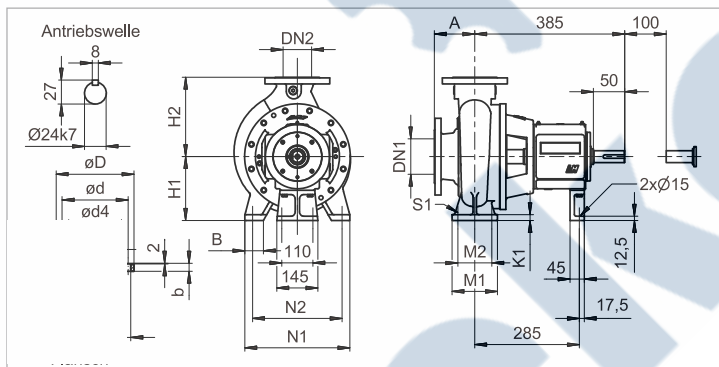


Type BPP 032-200 - BPP 050-200

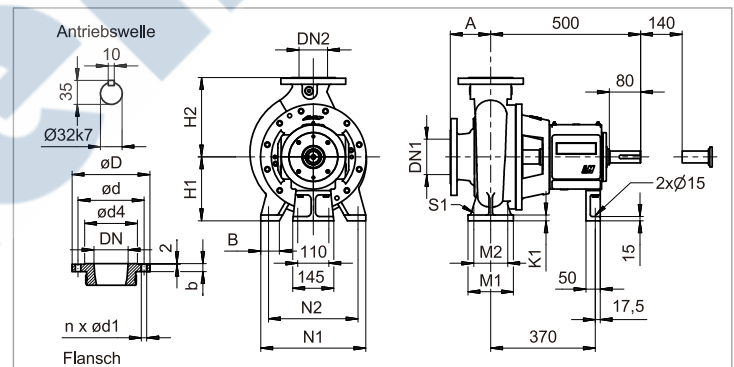


Type BPP 065-200 - BPP 50-315

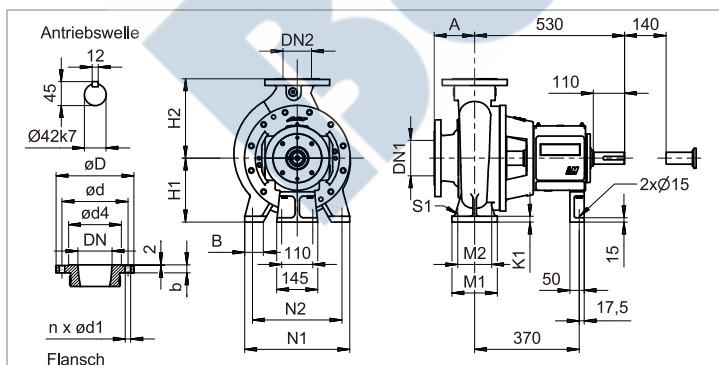

Type BPP 100-250 - BPP 125-400

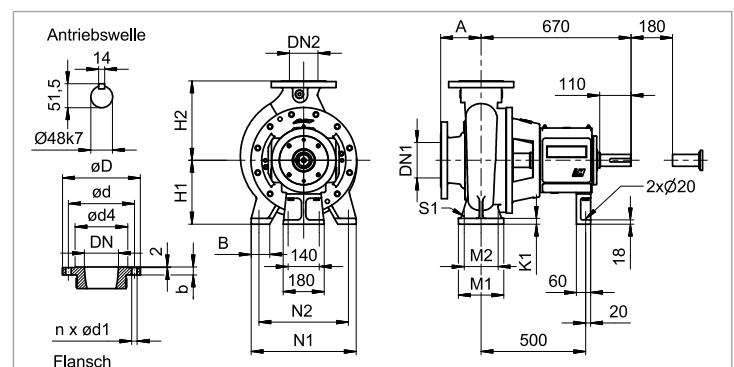

Type BPP 200-250 - BPP 200-400


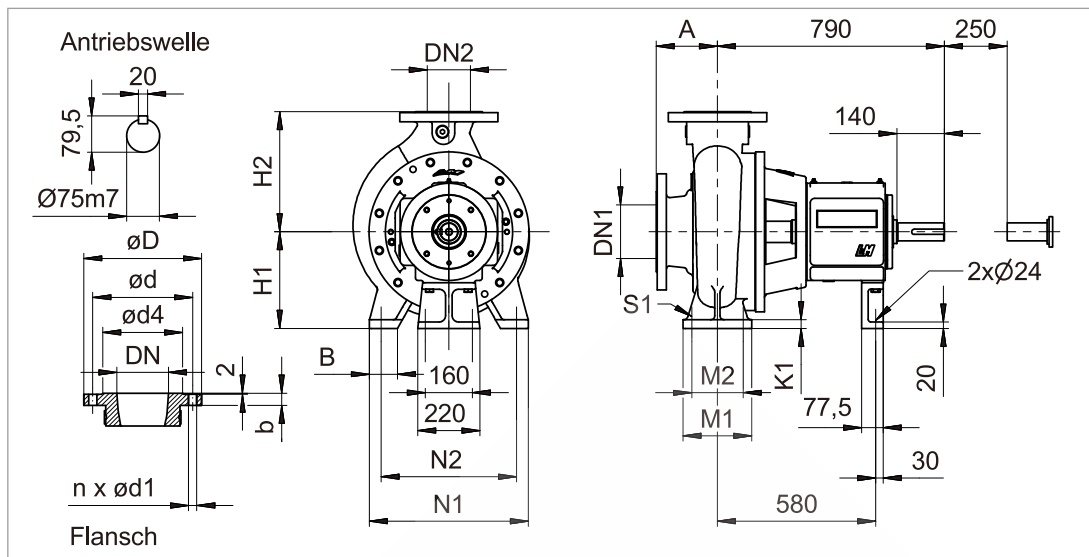


Type BPP 250-400 - BPP 300-600

Outline drawing – Dimensions

Type	BG	DN 1	DN 2	A	H1	H2	B	M1	M2	N1	N2	S1	K1	ca. KG
32-200	1	050	032	080	160	180	45	100	70	230	190	15	15	65
40-200	1	065	040	080	160	180	45	100	70	255	212	15	15	66
50-200	1	080	050	080	160	180	45	100	70	255	212	15	15	66
65-200	2	100	065	100	180	225	55	125	95	300	250	15	18	100
80-200	2	125	080	125	180	250	55	125	95	330	280	15	18	100
32-250	2	050	032	100	180	225	55	125	95	300	250	15	18	103
40-250	2	065	040	100	180	225	55	125	95	300	250	15	18	103
50-250	2	080	050	125	180	225	55	125	95	300	250	15	18	105
65-250	2	100	065	125	200	250	65	160	120	340	280	19	20	107
80-250	2	125	080	125	225	280	65	160	120	370	315	19	20	112
40-315	2	065	040	125	225	280	55	125	95	330	280	15	18	131
50-315	2	080	050	125	225	280	55	125	95	330	280	15	18	141
100-250	3	125	100	140	225	280	65	160	120	370	315	19	20	162
125-250	3	150	125	140	250	355	65	160	120	370	315	19	20	178
150-250	3	200	150	160	280	375	85	200	150	470	400	24	20	208
65-315	3	100	065	125	225	280	65	160	120	370	315	19	20	167
80-315	3	125	080	125	250	315	65	160	120	370	315	19	20	172
100-315	3	125	100	140	250	315	65	160	120	370	315	19	20	182
125-315	3	150	125	140	280	355	85	200	150	470	400	24	20	102
100-400	3	125	100	140	280	355	85	200	150	470	400	24	20	223
125-400	3	150	125	140	315	400	85	200	150	470	400	24	20	238
200-250	4	250	200	200	315	450	85	200	150	520	450	24	25	305
300-250	4	300	300	225	400	560	90	250	190	570	500	28	25	405
150-315	4	200	150	160	315	400	85	200	150	520	450	24	25	255
200-315	4	250	200	180	315	450	85	200	150	520	450	24	25	295
250-315	4	300	250	225	400	560	90	250	190	570	500	28	25	375
300-315	4	350	300	250	450	630	90	250	190	570	500	28	25	475
150-400	4	200	150	160	315	450	85	200	150	520	450	24	25	285
200-400	4	250	200	180	355	500	85	200	150	520	450	24	25	330
250-400	5	300	250	200	450	560	90	250	190	570	500	28	25	440
300-400	5	350	300	250	450	670	90	250	190	570	500	28	25	575
350-500	5	400	350	280	560	800	110	315	250	680	600	28	30	745
400-500	5	400	400	280	630	850	135	400	315	940	850	35	30	855
100-500	5	200	100	180	400	500	90	250	190	570	500	28	25	355
150-500	5	250	150	180	400	500	90	250	190	570	500	28	25	385
200-500	5	250	200	180	400	560	90	250	190	570	500	28	25	505
250-500	5	300	250	200	450	630	90	250	190	570	500	28	25	570
300-500	5	350	300	250	500	670	90	250	190	570	500	28	25	625
400-600	5	500	400	355	630	850	135	400	315	940	850	35	30	1035
500-600	5	500	500	355	710	1000	135	400	315	940	850	35	30	1175
200-600	5	300	200	200	500	630	110	315	250	680	600	28	30	805
250-600	5	300	250	225	500	710	110	315	250	680	600	28	30	885
300-600	5	400	300	250	560	800	110	315	250	680	600	28	30	970

Performance Curve

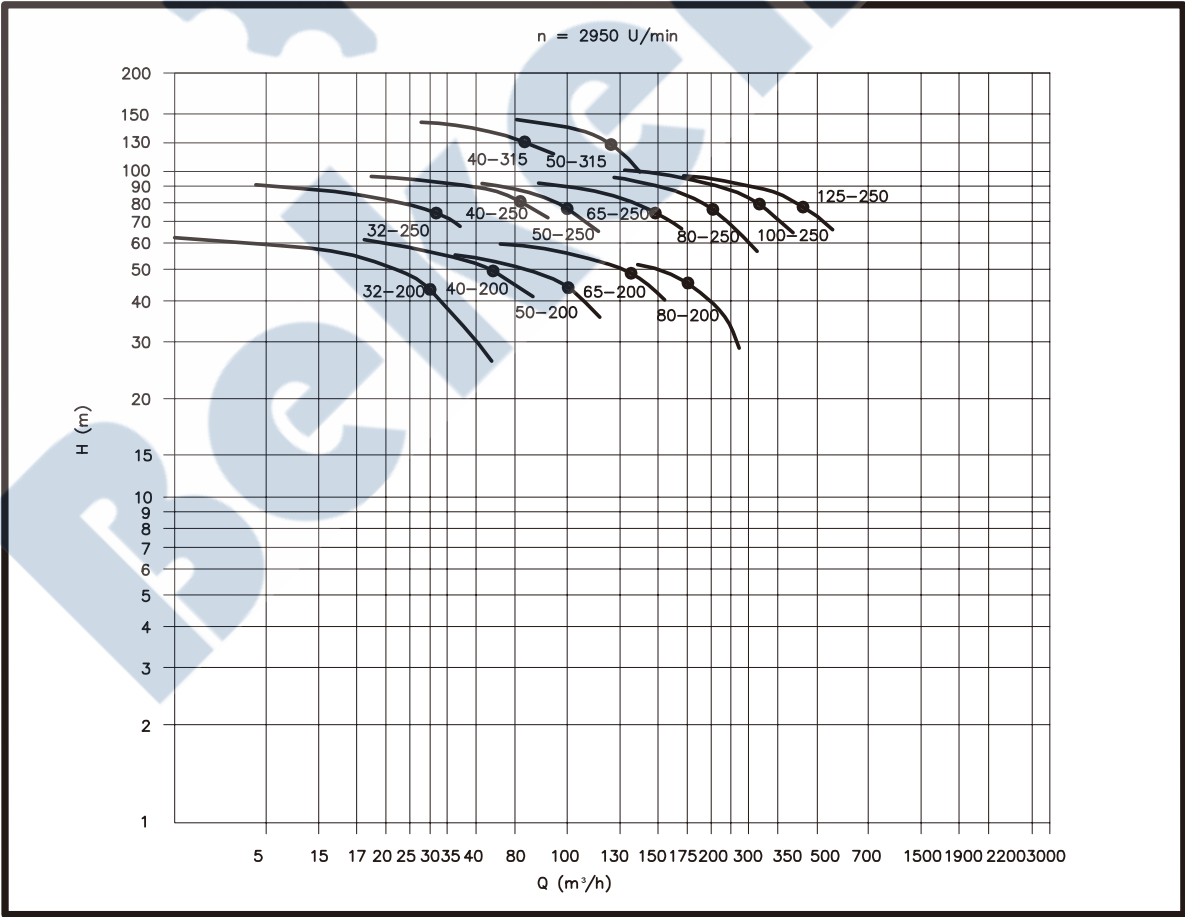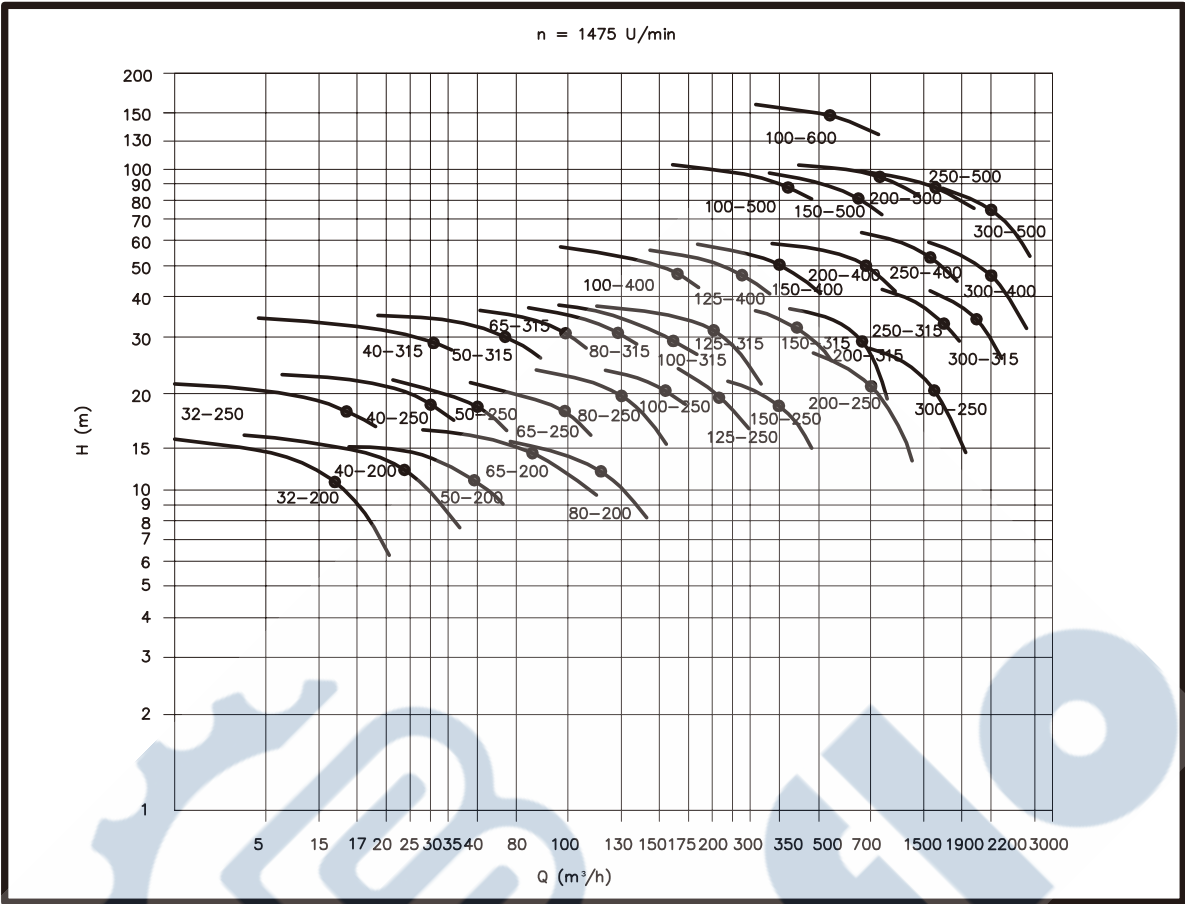

Brands interchangeable:

Sulzer APP/AUP/CPT/MBN/MC/ZE,
Andritz ACP/MC, Godwin, Pioneer, KSB, Goulds 3196,
Durco Mark III, Gorman-rupp. Monoyo/Seepex/Netzsch,
Warman AH, Flowserve LC, Tsurumi pump, etc.



BEST OEM

INNOVATION

Fuzhou Beken Fluid Co.,LTD.

Add:11th floor, ZhongMing TianAo Building,
No.169 Hudong Road, GuLou District,Fuzhou,Fujian,China.

Tel: 0086-591-87557702

Fax: 0086-591-87557702

Website:www.bekenflo.com

Email: sales@bekenflo.com

Mobile: 0086-18065068870.